

# SPEAKMAN®

SE-623

## Stainless Steel Combination Shower with Rectangular Eyewash & Eye/Face Wash Bowl

SPECIFICATION



### FEATURES:

- 8 in. diameter stainless steel showerhead
- Internal 20 gpm flow control
- 1" NPT female brass, stainless steel full flow stay-open ball valve
- Stainless steel triangular pull rod activation
- 1 ¼" stainless steel 18 gauge tubing stanchion
- 1 ¼" NPT male inlet & waste
- 20 @ 30 psi

### EYE/FACE WASH: SE-400

- (6) chrome plated aerators, plastic covered brass bodies
- Stainless steel bowl
- ½ in. NPT female brass chrome plated valve
- Stainless steel push handle activator
- ½ in. NPT female inlet
- 9.3 gpm @ 30 psi
- Universal emergency sign included

### COMPLIANCE:

- Certified to ANSI/ISEA Z358.1

### FINISHES:

- DuraJade™ powder-coated galvanized steel (standard)

### OPTIONS:

- Stainless steel cover  -CV
- Anti-freeze protection valve  -FPV
- Hand & foot operation  -HFO
- Hand-held spray  -HS
- Self-closing shower valve with chain & ring  -SCSV
- Stainless steel pull rod  -SPR
- Anti-scald protection valve  -SPV
- Substituting a 1 in. IPS stainless steel ball valve  -SSBV1
- Substituting a ½ in. IPS stainless steel ball valve  -SSBV2

### WARRANTY:

- 3 year limited

SEE REVERSE FOR ROUGH-IN DIMENSIONS

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

# SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720  
P: 800-537-2107 | F: 800-977-2747  
WWW.SPEAKMANCOMPANY.COM

REVISION DATE: FEBRUARY 2015


Management Systems  
Registered to ISO 9001

653

# SPEAKMAN®

## Stainless Steel Combination Shower with Rectangular Eyewash & Eye/Face Wash Bowl SE-623

SPECIFICATION

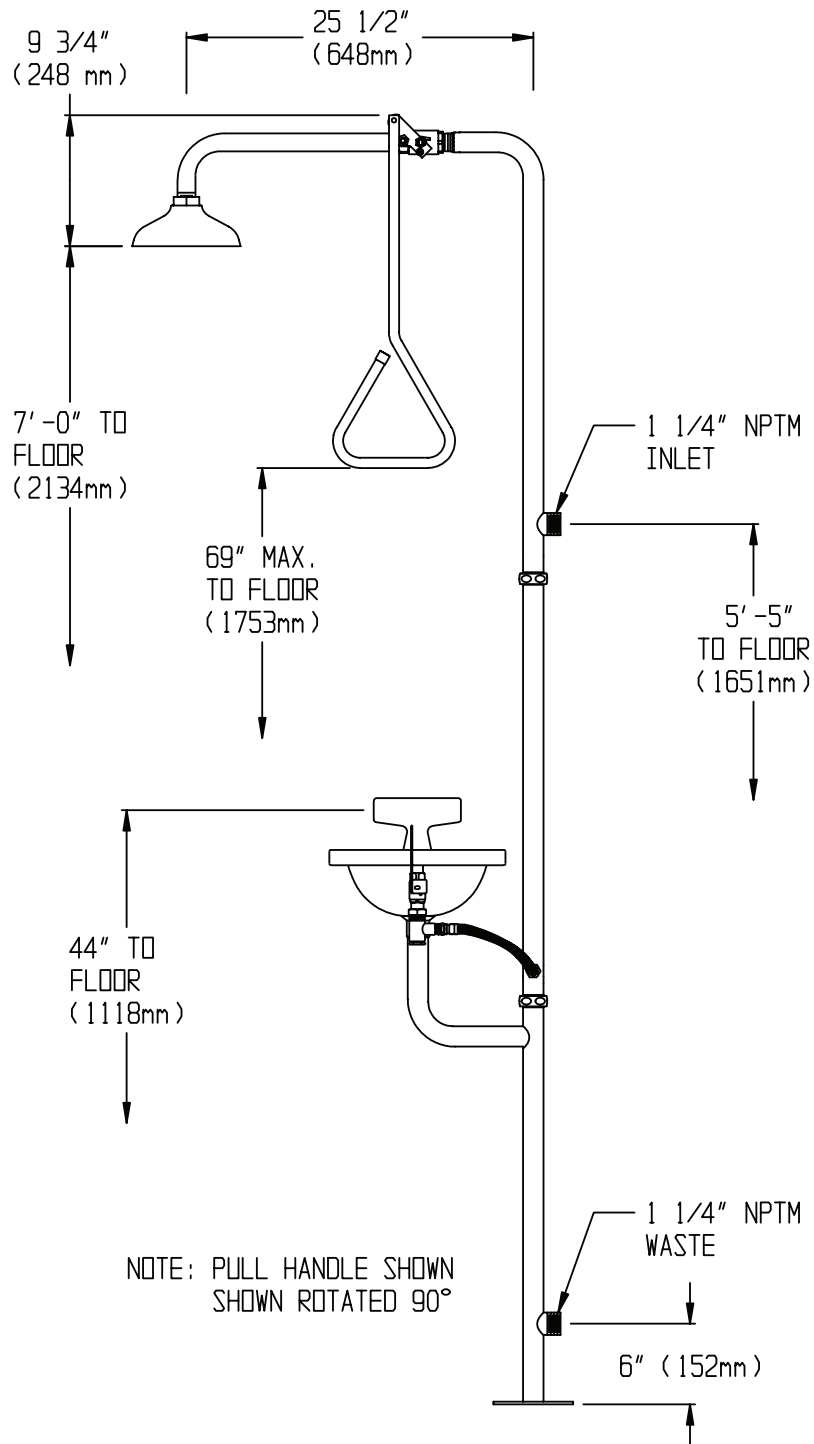

NOTE: 1. All dimensions are in inches (millimeters) unless otherwise specified and are subject to change without notice.

THIS SPACE FOR ARCHITECT/ENGINEER APPROVAL.

# SPEAKMAN®

400 ANCHOR MILL ROAD | NEW CASTLE, DE 19720  
P: 800-537-2107 | F: 800-977-2747  
WWW.SPEAKMANCOMPANY.COM

Management Systems  
Registered to ISO 9001

REVISION DATE: FEBRUARY 2015